

WOOD FIBREBOARDS

WEKO OFFERS SOLUTIONS ...

weko



APPLICATION OF WATER AND RELEASE AGENT

WOOD FIBREBOARDS – APPLICATION OF WATER AND RELEASE AGENT

THE TASK

INCREASING PRODUCTIVITY AND LOWERING MATERIAL CONSUMPTION

To activate the adhesive in the hot press when manufacturing wood fibreboards in a short amount of time, the effect of steam from the surface can accelerate and intensify heating. This so-called steam shock makes high moisture of the entire fibre material superfluous, since the steam is pressed into the briquette penetrating all the way to the centre layers.

However, the amount of liquid must be applied very exactly to both sides.

Another challenge in production is that the moist fibre cake, when applied to the conveyor belt, can adhere to the mould substrate or later the press. This soils the plant.

The task at hand is to apply water very finely and exactly metered on both sides of the fibre cake. Exactly metered, added separating agent, at the same time prevents adhesion of the fibre cake to the production equipment and soiling it.

Application of water

Because of the so-called steam shock, the heat of the downstream hot press penetrates the fibre web more quickly, the adhesive is activated more rapidly and the press time is reduced.

This leads to greater production speeds and, in addition, increased board density and improved smoothness of the surface, which reduces the subsequent sanding process and, consequently, material consumption.

Addition of release agents

Applying a release agent on the fibre cake and the conveyor belt prevents the fibre cake from sticking to the conveyor belt and the moulding press.

OPTIMALLY CURED WOOD FIBREBOARDS REQUIRE LESS GRINDING ALLOWANCE AND THUS LESS MATERIAL.



THE SOLUTION

NON-CONTACT LIQUID APPLICATION WITH FINEST METERING


Effectively utilising the steam shock is a very efficient option of activating the adhesive in the fibre cake. WEKO-Fluid-Application-Systems (WFA) such as **WEKO-FLOW** with **WEKO-SIGMA** ensure exactly metered liquid application on the fibre cake, because the WFA work with a highly efficient rotor technology. They generate micro-droplets sprayed without direct contact and exactly measurable across the entire width of the fibre or chip cake as well as the forming belt. The application quantity automatically adjusts to the machine speed ensuring a constant, reproducible and uniform application.

Release agents are added, metered and applied in smallest amounts as needed. In addition, the WFA can be adjusted flexibly enough to be profitable also with very small production runs.

THE REALISATION

WOOD FIBREBOARD NEEDS WEKO-FLOW WITH WEKO-SIGMA

WEKO-Fluid-Application-Systems for the coating of the fibre cake, comprised of the Liquid Supply Unit and System Controller **WEKO-FLOW** in various versions with the rotor carrier **WEKO-SIGMA**.*

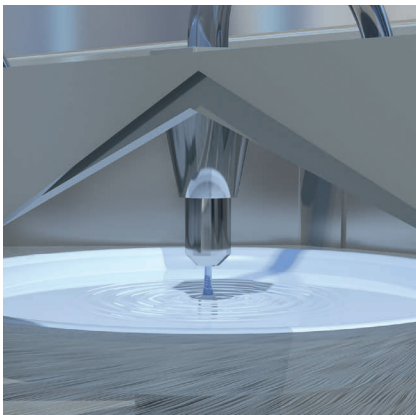

ULTRA-FINE METERING APPLICATION SYSTEMS FROM WEKO FOR PRECISE, REPRODUCIBLE RESULTS WITH MAXIMUM PRESERVATION OF YOUR RESOURCES.


* For technical details, refer to the technical page WEKO-FLOW with WEKO-SIGMA

THE GOAL IS TO USE THE LIQUIDS EFFECTIVELY ENOUGH TO OPTIMISE YOUR OUTPUT.




Your benefits at a glance

- Precisely defined reproducible application quantity
- High long-term constancy of liquid quantity and distribution
- Low energy consumption
- User-friendly
- Long service intervals through flow and return filter system
- Resource-preserving liquid management
- Smooth integration/retrofitting for existing forming lines
- Reduction of the press time, grinding allowances and varnish consumption
- Increasing the board density as well as the bending and delamination strength
- Increasing quality and productivity

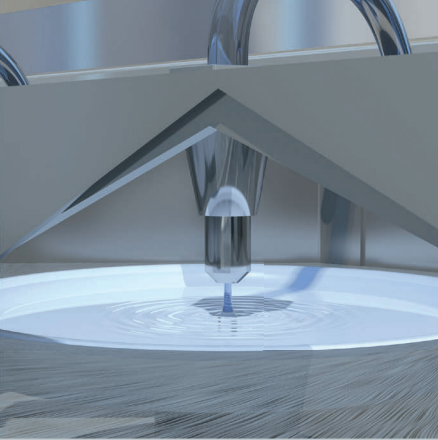

ENGINEERING – WATER AND RELEASE AGENT APPLICATION NEED WEKO-FLOW WITH WEKO-SIGMA

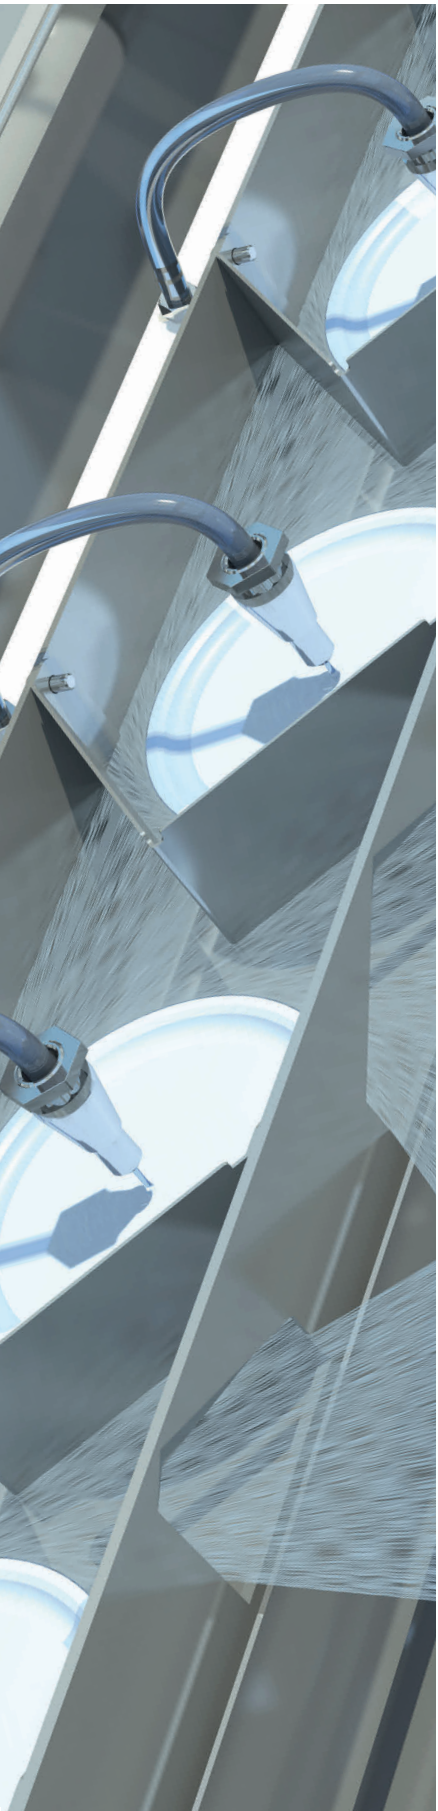

COATING WOOD FIBREBOARDS WITH THE NON-CONTACT APPLICATION SYSTEM

You would like to apply water and release agent to manufacture wood fibreboards with maximum productivity and minimum material consumption? With WEKO-Fluid-Application-Systems (WFA), consisting of **WEKO-FLOW** in various practical versions, and **WEKO-SIGMA**, this task is easily managed, because with spray application coating can be metered very precisely and reproduced at any time. This saves valuable resources and provides you with much flexibility. Water with release agents or other additives is applied entirely as needed and with smallest amounts. What's more, the systems can be adjusted flexibly enough to be profitable also with very small production runs.

This is how it works

Coating is applied with the **WEKO-SIGMA** rotor carrier. Spray disks, the so-called rotors, are arranged side by side in the rotor carrier. They are supplied by the **WEKO-FLOW** Liquid Supply Unit with the desired amount of liquid. The rapid rotation of the rotors produces a uniform flow of microscopically small droplets. Adjustable sliders direct the flow so that a defined spray fan is created for each rotor. The individual spray fans are seamlessly arranged side by side providing uniform application.

Always the right amount of liquid


The purpose of the **WEKO-FLOW** is to supply the application system with the desired amount of liquid. Furthermore, it is responsible for the control and regulation of the entire rotor application system. The frequency-controlled rotary pump transports the liquid from the storage tank to the rotor carrier. A flow meter monitors the supplied quantity according to the quantity specification and the rotary pump's speed is controlled. The application quantity is automatically adjusted to the machine speed keeping metering constant. Liquid not sprayed by the rotor carrier is returned to the storage tank of the supply unit. Consequently, it is not lost but remains in the liquid circulation.

THE WEKO-SIGMA ROTOR CARRIER DISTRIBUTES THE LIQUID VIA ROTORS UNIFORMLY ON THE FIBRE CAKE.

Convincing in handling and maintenance

The modular units **WEKO-FLOW** and **WEKO-SIGMA** were adjusted in Development and Engineering for the use with a variety of liquids. It is important especially when using chemicals that the retooling and cleaning times are kept short to ensure high productivity. We have given special attention to the convenient handling and easy maintenance of all components allowing them to work reliably for a very long time.

The result is easy access to all components and especially quick and simple replacement of the rotors.

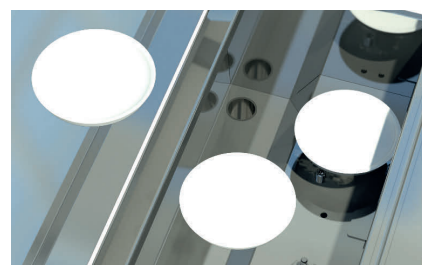

THE ROTORS CAN BE REMOVED
IN A FEW STEPS.

A MODEL OF THE WEKO-FLOW
SERIES, CONSISTING OF: STORAGE
TANK, ROTARY PUMP, PREFILTER,
HYDRAULIC ELEMENTS, TOUCH-
PANEL, PLC SYSTEM CONTROL
AND MONITORING.



WEKO-FLOW with WEKO-SIGMA at a glance

- Various model series according to the demand
- Exactly defined application quantity, also in the minimal range, that can be reproduced at any time
- High long-term constancy of liquid quantity and distribution
- Economic consumption of application medium
- Non-contact application
- Automatic speed adaptation
- Low energy consumption
- Operator-friendly through rotors simply plugged in and removable as well as removable liquid supply system
- Drive components and bearings separated from the spray area
- Short retooling times
- Low maintenance
- Very long service life
- Compact space-saving design
- Modular design allows easy adjustment to applications and customer requirements
- Touch panel with user-friendly system interface
- Good accessibility for system service and liquid change
- Flushing program programmable to specific applications and pump-out of residual liquid



SERVICE – WEKO OFFERS SOLUTIONS ...



The WEKO experts offer support worldwide with the choice of WEKO Application Systems and integration into the production process. They help our customers enjoy clear benefits with costs and utilisation. Comprehensive services such as testing at the WEKO Technology Centre and high WEKO service standards complete the offering.

In addition to the main office near Stuttgart, WEKO maintains production locations in Germany and Brazil, own sales and service subsidiaries in Italy, the United Kingdom, the United States and Brazil. Furthermore, we collaborate worldwide with representatives who not only market our products but also offer the proven WEKO Service. We are glad to answer any questions.

Wherever you are using WEKO – we maintain close contact with you anywhere on the globe for the entire life cycle of our systems. You can rely on us – worldwide!

FREE HOTLINE FROM MONDAY THROUGH SATURDAY
FROM 07.00 – 22.00 HRS CET: TEL. +49 (0) 7 11-79 88-234
SERVICE@WEKO.NET



... for stable productivity. Your benefits:



Individual consulting and training: Support with all concerns of application technology and comprehensive instruction of operation personnel



Pre-Sales Service: Meaningful practical tests at our technical centre or using a rental unit in your production environment for solid investment decision



Assembly and commissioning: Quick production start thanks to professional assembly and commissioning by experienced WEKO service technicians



Spare part service: For consistent quality and maximum availability of your machine, usually within 24 hours at a fair price




Retrofit and upgrading: Securing productivity of the durable WEKO application systems



Maintenance and repair: Clearly defined scope of services at fixed price or based on time & materials at preferred date or within scope of service agreement

NOTES

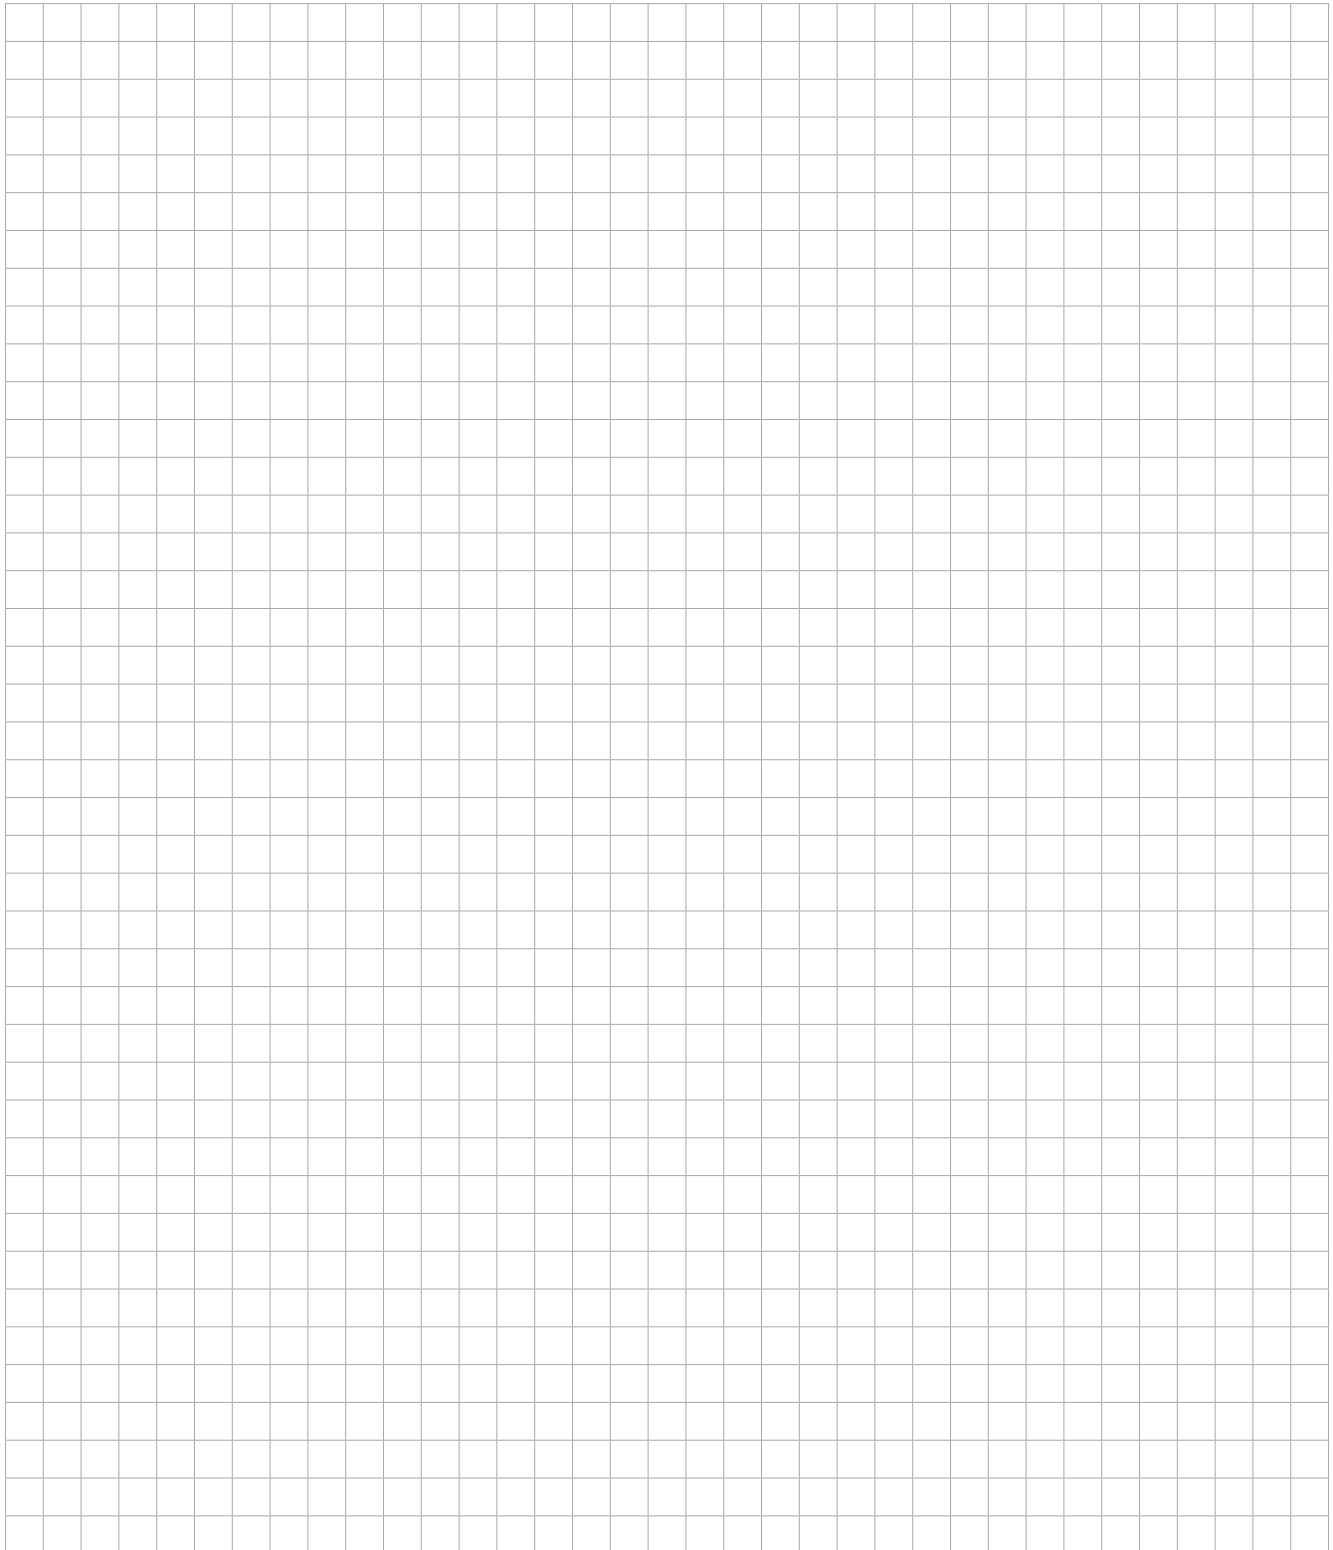



WEITMANN & KONRAD GMBH & CO. KG

Friedrich-List-Straße 20–24
D-70771 Leinfelden-Echterdingen
Tel. +49 (0) 7 11-7 98 80
Fax +49 (0) 7 11-7 98 81 14
Email: info@weko.net
Web: www.weko.net

Version: 28.08.2018

